

PROVENCE

47" Video Wall Monitor

website: <http://www.china-provence.com>

Tel: +86 755 2943 8865 | Fax: +86 755 2960 4644 | E-mail: cl@szprovence.com

Add:9th Building, Houting 2nd Industrial Area,Shajing Town, Baoan District, Shenzhen, China.

| Product Description | | | | Picture&Price | |
|-----------------------------|------------------------|-----|------|--|--|
| LCD panel | | | |  | |
| Diagonal Size | 47" | | | | |
| Aspect Ratio | 16:9 | | | | |
| Pixel Pitch | 0.5415(H) x 0.5415(W) | | | | |
| Response Time | 12ms | | | | |
| Resolution | 1920*1080 | | | | |
| Contrast Ratio | 1400:1 | | | | |
| Brightness (cd/m2) | 500cd/m2 | | | | |
| Active display area | 1039.68 (H) x584.82(V) | | | | |
| Display Color (Max) | 1067M | | | | |
| Viewing Angle(U/D,L/R) | H:89o/89o V:89o/89o | | | | |
| I/O (Input) | tanda | -4 | -D | | |
| VGA | X1 | X1 | X1 | | |
| DVI | X1 | X1 | X2 | | |
| HDMI | X1 | X1 | X1 | | |
| Display Port(DP) | / | / | X1 | | |
| YPbPr | / | / | X1 | | |
| CVBS | X2 | X4 | X2 | | |
| Svideo | / | / | / | | |
| RJ45(for RS232 IN) | X1 | X1 | X1 | | |
| USB(for Debug) | X1 | X1 | / | | |
| I/O (Output) | | | | | |
| RJ45(for RS232 OUT) | X2 | X2 | X1 | | |
| Display Port(DP) | / | / | X1 | | |
| CVBS out | / | / | / | | |
| Features and Benefits | | | | | |
| Daisy chain | NO | NO | >100 | | |
| ID code(by software) | NO | NO | Yes | | |
| Support 4K mode | NO | NO | Yes | | |
| Multi monitors (Max:15x15) | Yes | Yes | Yes | | |
| Image residual function | Yes | Yes | Yes | | |
| Built-in temperature sensor | Yes | Yes | Yes | | |
| Colour Auto balance | Yes | Yes | Yes | | |
| On/Off Timer | Yes | Yes | Yes | | |
| License Agreement | Yes | Yes | Yes | | |
| Brightness is balanced | Yes | Yes | Yes | | |
| ECO mode | Yes | Yes | Yes | | |
| Smart fan | Yes | Yes | Yes | | |

Model: PM470UT2

Gap between 2 screen: 4.9mm Recommended: -D version,
Creat 2 windows(Max 3 windows) with PCNR - 100 signal converter.

| Items & Qty (pieces) | Unit Price (USD/piece, EX-W) |
|----------------------|------------------------------|
| 1PCS | 1250 |
| EXW | SHEN ZHEN |
| Sample 1PCS | 1500 |

| | |
|-----------------------------|---|
| Terms And Conditions | 15% extra charge for sample, |
| Payment Term : | Sight L/C or T/T |
| Trade Terms: | EX-W, FOB(shenzhen) |
| Brand: | Follow Client's Command (Ours, OEM/ODM) |
| Valid Date: | 7 days |
| Delivery Time: | Within 15 Days After payment |

About Samples

and will be returned when a purchase order is placed.

Contact

| | |
|------------|--|
| Contacter: | |
| Mob: | |
| Email: | |




POWER

| | |
|-------------------|-----------------------------------|
| Power supply: | AC Input 100~240V(+/-10%)/50-60Hz |
| Power consumpiton | Max:220W / Standard:145W |
| Stand-by: | ≤1W |

Operation/Sotrage

| | |
|-----------------------|----------|
| Operating Temperature | 00C~400C |
|-----------------------|----------|

| | | | | | |
|-------------------------|--------------------------------|-----|--------------------------|--|-------------------------|
| Work status display | Yes | Yes | Yes | Operating Humidity | 10%~90% |
| Multi Windows | Yes | Yes | Max 3 | Storage Temperature | -200C~600C |
| Roaming | Yes | Yes | Yes | Storage Humidity | 0%~90% |
| Vertical video wall | NO | Yes | NO | Safety and Ergonomics | |
| Any mode video wall | NO | Yes | NO | Quality standards: | ISO9001,CCC,FCC,CE,ROHS |
| Technical Specification | | | Environmental standards: | | |
| OSD language | 中文, English | | | All components,accessories and packing are compliant with international standards. | |
| Video Format | PAL、 NTSC | | | Optional accessories | |
| Case Material | Metal | | | Wall mount | DVI cable(1.5m) |
| Color | Black | | | RS232 to USB converter | HDMI cable(1.5m) |
| Horizontal | 20 ~ | | | BNC to RCA connector | VGA to BNC cable(1.5m) |
| Vertical Frequency | 55~75Hz | | | BNC to BNC cable(1.5m) | RJ45 to RS232 connector |
| Optimum Resolution | 1920x1080 at 60HZ | | | Accessoires | |
| Native Resolution | 1920x1080 at 60HZ | | | User manual x1 | Net cable(1.8m) x1 |
| Supported Resolutions | 1920x1080;1680x1050;1600x1200; | | | Power cord(1.8m) x1 | Certificate card x1 |
| | 1440x1050;1360x768; 1280x1024; | | | Mechanical Spec | |
| | 1280x768; | | | NW/GW: | 24.5kg/pcs; 56kg/Carton |
| | 1024x768;832x62 | | | Bezel (U/D/L/R) | |
| | 800x600;720x400 ; 600x480; | | | | |
| Video Modes (no tuner) | 480i;480p;576i;576p; | | | Dimension(W/O stand): | 1045*590*124mm |
| | 720p(50 and 60HZ); | | | Packing Dimension (2 pcs/ctn): | 1145x465x715mm |
| | 1080i(50 and 60HZ); | | | Warranty | |
| | 1080p(50 and 60HZ) | | | 13 months (LCD monitor and components) | |
| | | | | | |

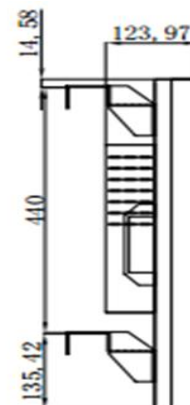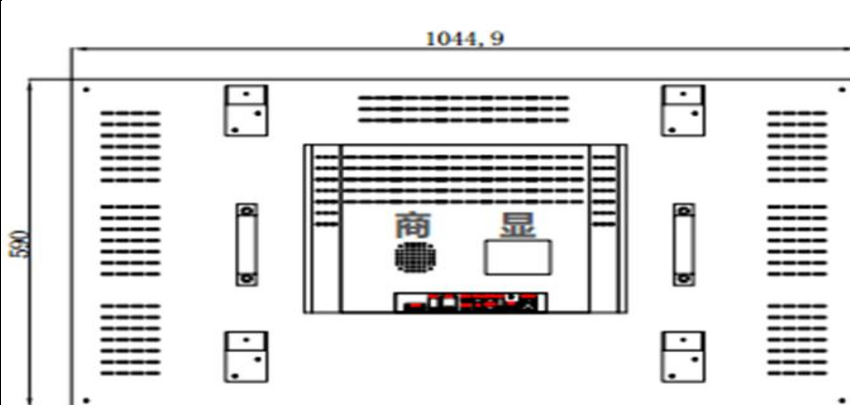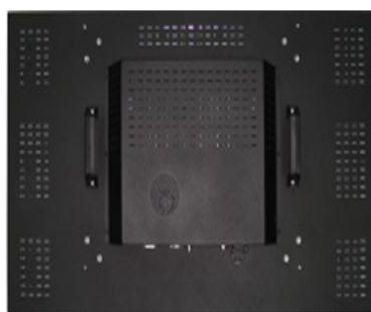



Quad Mutiplexer function



Irregular/Art video wall

Attention: This is only for reference, product appearance depends on goods

Provence Group(HK)

Provence technology(SZ) Co.Ltd.

Tel: +86 755 2943 8865 | Fax: +86 755 2960 4644 | E-mail: cl@szprovence.com

PROVENCE